


ANTENNA CONNECTOR "A"


ANTENNA CONNECTOR "B"

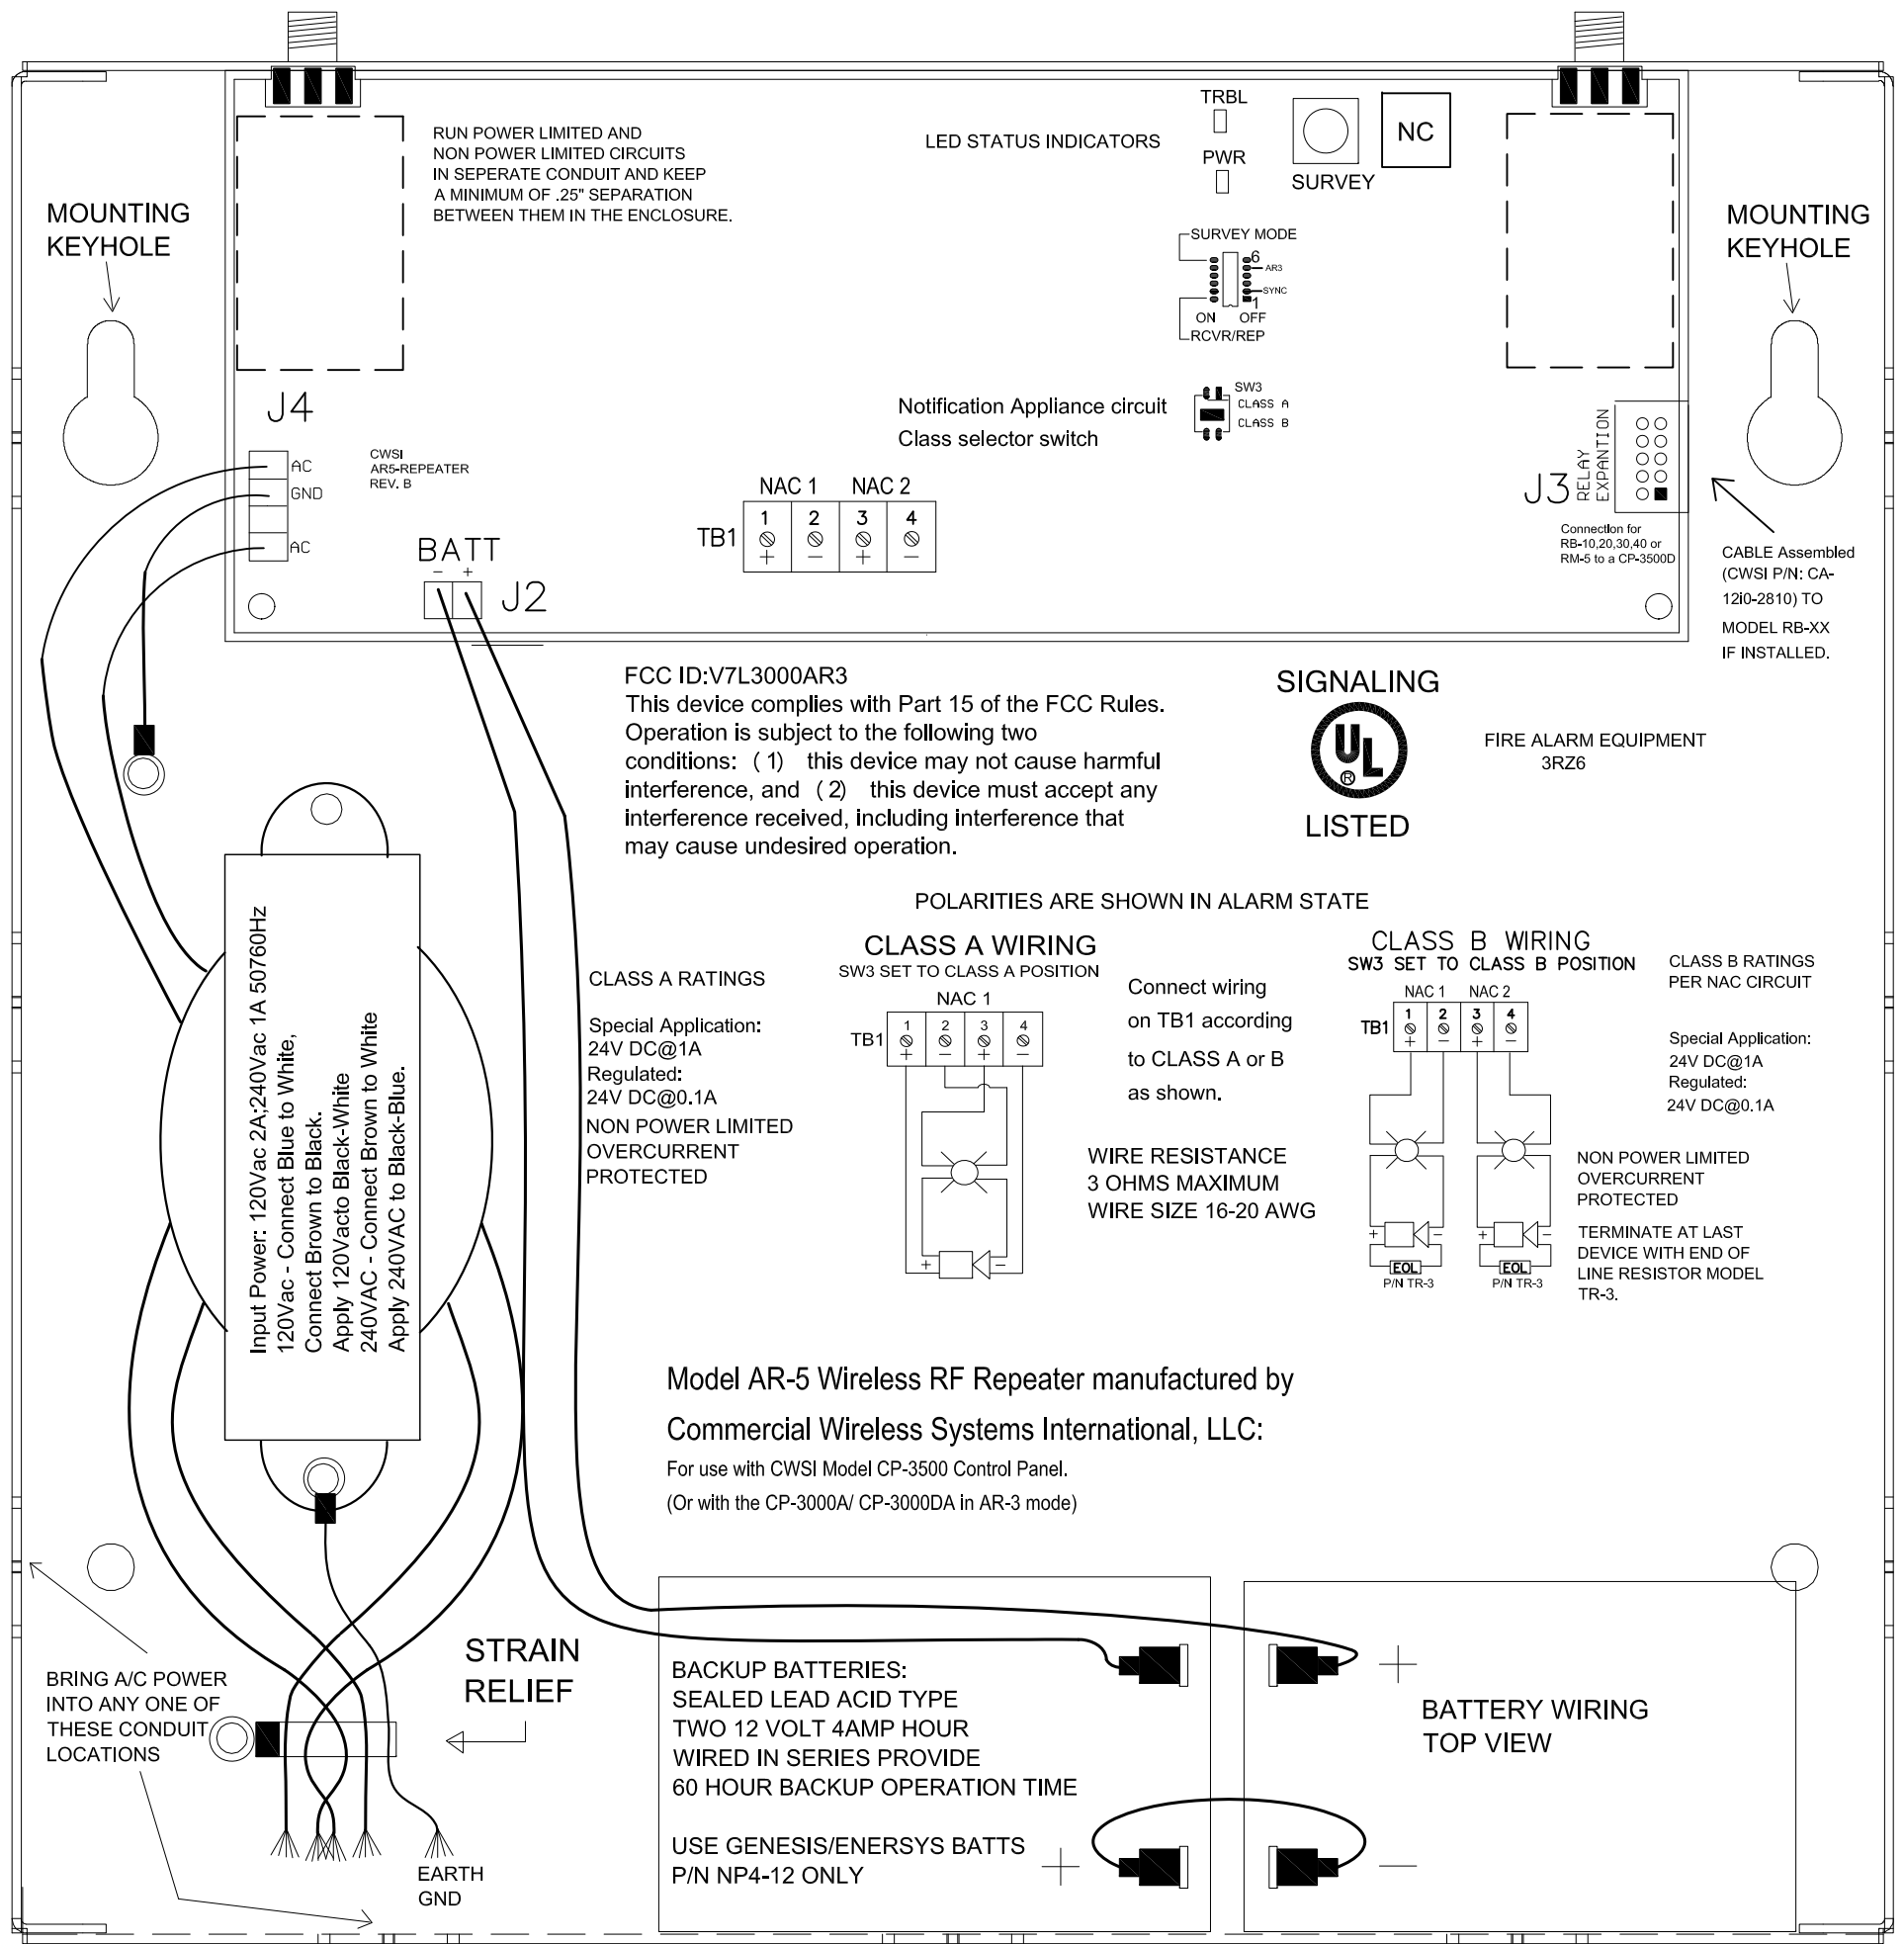


RUN POWER LIMITED AND NON POWER LIMITED CIRCUITS IN SEPERATE CONDUIT AND KEEP A MINIMUM OF .25" SEPARATION BETWEEN THEM IN THE ENCLOSURE.

CWSI AR5-REPEATER REV. B


Input Power: 120Vac 2A;240Vac 1A 50/60Hz
 120Vac - Connect Blue to White, Connect Brown to Black.
 Apply 120Vacto Black-White
 240VAC - Connect Brown to White
 Apply 240VAC to Black-Blue.



CLASS A WIRING



CLASS B WIRING



CLASS B RATINGS PER NAC CIRCUIT

Special Application: 24V DC@1A
 Regulated: 24V DC@0.1A

NON POWER LIMITED OVERCURRENT PROTECTED
 TERMINATE AT LAST DEVICE WITH END OF LINE RESISTOR MODEL TR-3.

BACKUP BATTERIES: SEALED LEAD ACID TYPE TWO 12 VOLT 4AMP HOUR WIRED IN SERIES PROVIDE 60 HOUR BACKUP OPERATION TIME

USE GENESIS/ENERSYS BATTS P/N NP4-12 ONLY

BATTERY WIRING TOP VIEW